


COMPOSITE TECH BRIEF

feature of all LCM processes. The gaps between mold and preform may serve as channels of low resistance (racetracking channels) by resin. Their presence-or absence-may significantly alter the subsequent filling stage of the process, lowering part quality or increasing number of rejected parts. The variability can be accounted for and various passive-and active-control schemes were examined, implemented and tested to reduce or eliminate this problem.

RESIN INJECTION STAGE

The resin is injected into a closed mold through a gate or gates. The location of the gate plays a key role in governing the flow dynamics of the resin. The dynamics decide if the

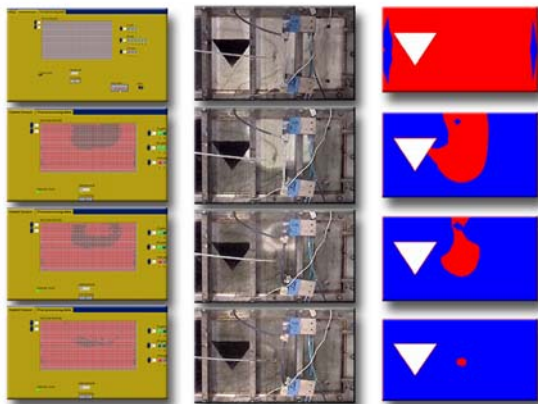

resin will displace all the air and fill up the empty space in the mold or if certain regions will remain unfilled with resin. The unfilled regions are known as voids or dry spots. They are undesirable as their existence results usually in rejection of the manufactured part. The number and position of the gates also dictate how fast the filling process can be completed which is also important as reduction in filling time translates into lower cycle time and better production efficiency. As one cannot visualize the resin flow inside the closed and non-transparent mold, the incorrect placement of the gate is

usually uncovered by detection of voids in the manufactured part. Re-machining to relocate the gate can be expensive in both money and time.

Thus, most of the process design, most importantly the gate and vent locations to let the displaced air out, should be accomplished before mold construction. Simulation tools, such as LIMS (Liquid Injection Molding

Simulation) from University of Delaware that can predict the movement of the resin inside a closed mold can be used for this purpose.

The crucial data needed for this simulation is the resin permeability, which quantifies the preform's resistance to flow. This is a second order tensor, depending on the preform architecture and deformation as stated above. To

establish permeability values, experiments must be conducted as the predictions based on analytic models are still quite inaccurate. Depending on which permeability components are needed one must choose a proper experimental setup. The number of experiments to be performed may be high, especially if preform shearing and compaction is to be included in the study. To alleviate this problem, one might use setup allowing continuous measurement while changing the preform compaction (and thus fiber volume fraction).



CURE AND DE-MOLDING

After successful filling, the resin is allowed to cure, either at room temperature or by the means of heating elements within the mold. The curing reaction is exothermic and substantial amount of heat may be generated during

curing, non-uniformly elevating the system temperature. The temperature and degree of cure during the reaction are very important. Non-uniform temperature field generally results in residual stress and/or deformation (warp) of the finished part. Numerical modeling may be used to determine in advance whether this is likely to happen. The issue then may be addressed by several means, like stacking sequence of the preform layers or careful temperature control during curing stage.

TECHNICAL CONTACT:

Dr. Suresh Advani

phone: 302.831.8975

fax: 302.831.8525

advani@me.udel.edu

